


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Luzerne

WS-30118

PRODUCT DESCRIPTION

Fluted glass cylinders are nested together creating a striking prismatic effect. Substantial aged brass hardware complement the delicate crystaline elements elegantly. The texturaljuxtapositions raise the bar for lighting design. Advanced ACLED technology helps achieve a clean architectural look.

FEATURES

ACLED driverless technology

Extruded fluted glass

- Inner plate creates a mirrored effect
- Conversion plate included to accommodate 4" junction box

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV, 0-10V, TRIAC
Mounting	Can be mounted on wall in all orientations
Color Temp	3000К
CRI	90
Construction	Extruded aluminum body with glass shade and PC diffuser

REPLACEMENT PARTS


RPL-GLA-30118-01 - Fluted Glass (Long) RPL-GLA-30118-02 - Fluted Glass (Short)

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-30118 18"	3000K	AB Aged Brass BN Brushed Nickel	16.2W	1385	876

Example: WS-30118-BN

For custom requests please contact customs@modernforms.com



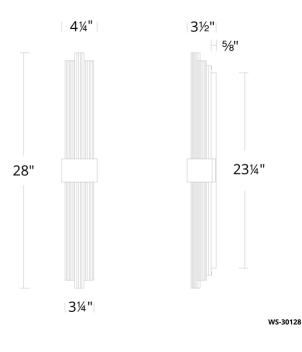

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Luzerne

WS-30128

PRODUCT DESCRIPTION

Fluted glass cylinders are nested together creating a striking prismatic effect. Substantial aged brass hardware complement the delicate crystaline elements elegantly. The texturaljuxtapositions raise the bar for lighting design. Advanced ACLED technology helps achieve a clean architectural look.

FEATURES

ACLED driverless technology

Extruded fluted glass

Inner plate creates a mirrored effect

Conversion plate included to accommodate 4" junction box

SPECIFICATIONS

Rated Life 54000 Hours Standards ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant Input 120 VAC,50/60Hz Dimming ELV, 0-10V, TRIAC Mounting Gan be mounted on wall in all orientations Color Temp 300K CRI 90 Construction Extruded aluminum body with glass shade and PC diffuser		
Input120 VAC,50/60HzDimmingELV, 0-10V, TRIACMountingCan be mounted on wall in all orientationsColor Temp3000KCRI90	Rated Life	54000 Hours
DimmingELV, 0-10V, TRIACMountingCan be mounted on wall in all orientationsColor Temp3000KCRI90	Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Mounting Can be mounted on wall in all orientations Color Temp 3000K CRI 90	Input	120 VAC,50/60Hz
Color Temp 3000K CRI 90	Dimming	ELV, 0-10V, TRIAC
CRI 90	Mounting	Can be mounted on wall in all orientations
	Color Temp	3000K
Construction Extruded aluminum body with glass shade and PC diffuser	CRI	90
	Construction	Extruded aluminum body with glass shade and PC diffuser

REPLACEMENT PARTS

RPL-GLA-30128-01 - Fluted Glass (Long) RPL-GLA-30128-02 - Fluted Glass (Short)

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-30128 28"	3000K	AB Aged Brass BN Brushed Nickel	21.4W	1848	1345

Example: WS-30128-BN

For custom requests please contact customs@modernforms.com